Determine the approximate measurements and mounting heights of the area you want to heat.

W-20

W-15 | SL-16 HEAT COVERAGE AREA: 5' x 5'

MOUNTING HEIGHT: 6' to 8'

W-15 LENGTH: 33" | 1500 WATTS SL-16 LENGTH: 29.5" | 1600 WATTS HEAT COVERAGE AREA: 6' x 6'

W-20 LENGTH: 39" | 2000 WATTS

MOUNTING HEIGHT: 7' to 9'

Select the heater(s) that will work both functionally and aesthetically for your space. Consider factors such as size, number of heaters, colors, and mounting options.

HEAT COVERAGE AREA: 8' x 8'

MOUNTING HEIGHT: 7' to 9'

W-30 LENGTH: 61.25" | 3000 WATTS

W-25 | WD-30 | SL-24 W-30 | SL-30

HEAT COVERAGE AREA: 7' x 7'

W-25 LENGTH: 39" | 2500 WATTS

WD-30 LENGTH: 33" | 3000 WATTS SL-24 LENGTH: 42.5" | 2400 WATTS

MOUNTING HEIGHT: 7' to 9'

W-40 | SL-40

HEAT COVERAGE AREA: 10' x 10' MOUNTING HEIGHT: 8' to 11'

W-40 LENGTH: 61.25" | 4000 WATTS

SL-40 LENGTH: 63.5" | 4000 WATTS

Choose the control option that works best for your desired control capabilities or budget. Options include value control installations or infinite adjustment with solid-state controls.


WD-50

WD-40

HEAT COVERAGE AREA: 8' x 10'

MOUNTING HEIGHT: 8' to 12'

WD-40 LENGTH: 39" | 4000 WATTS

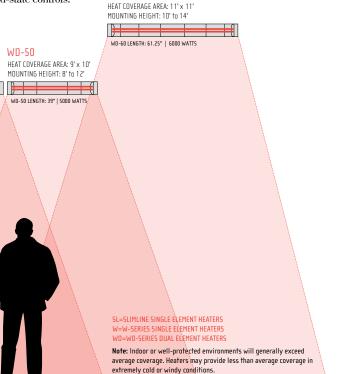

WD-60

## SAMPLE CONTROL OPTIONS



ON/OFF SWITCH

W-SERIES AND WD-SERIES HEATERS—WIDTH: 8" SLIMLINE SERIES HEATERS-WIDTH: 4.75"



DUPLEX/STACK SWITCH



INPUT REGULATOR



ANALOG CONTROL W/TIMER & RELAY PANEL







FLUSH MOUNT FRAME

Need help? We offer our customers comprehensive sales support and design assistance to help you select a system that will best meet your particular needs. To learn more, and to find a distributor near you, please contact us for prompt, professional service.

